

Unicon

Slide-Connect Exit




Emergency Self test function



■ FEATURES

- Self-testing as standard
- Multi-fit slide connect base
- Comes with both single and double sided decals in running man "Pictograph" and the "EXIT" decal
- Comes with large terminal block & cable entry
- Polycarbonate body with polycarbonate diffuser
- Wall, ceiling single-sided, ceiling double-sided mount & suspend
- Energy efficient, long life LED
- Dali option available as special order

■ DIMENSIONS

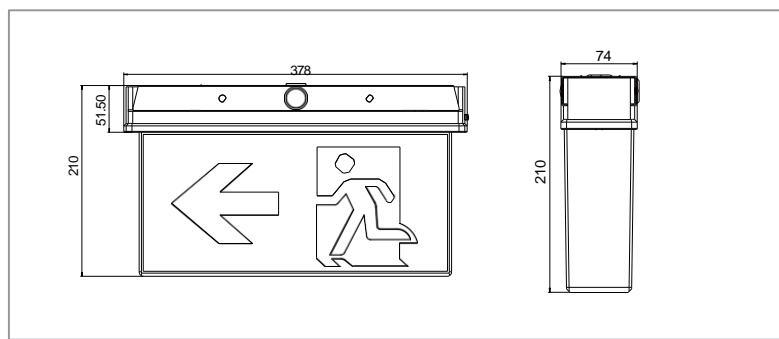

■ SPECIFICATIONS

Order Code	- White	E2306
	- Black	E2306B
Model Number	- White	GWUN2306
	- Black	GWUN2306B
Input Voltage		240v
Construction		Polycarbonate
Mounting		Ceiling and wall
Operating Mode		Maintained / Non Maintained
Testing System		Self Testing
Battery		Lithium 1500mAh LiFePO4 3 hr discharge
Classification		C0: D20 C90: D125
Viewing Distance		24m
Applicable Standard		AS/NZS2293
Lamps		LED 50,000hrs
Operating Temp		1°C to 40°C
Dimensions (mm)		378x210x74
Weight		1.49kg
Charging Method		Constant Current (16hrs Pulse Charge) (Standby)